




- Intel OPS standard module
- Supports Intel 10~11th Gen processor
- Dual channel DDR4 Memory
- 2 x M.2 2280/2242 SSD slot
- 8 x USB2.0/3.1/
- M.2 2230 WIFI/BT slot, support CNVi module
- Displays: 1 x HDMI2.0, 1 x HDMI(80pin) , 1 x DP1.2
- Support Intel vPro/AMT
- Support TPM2.0
- 12V/19V DC in


Specifications

Processor System	CPU	Intel® Comet Lake-S , LGA1200, TDP 35W		Intel® Rocket Lake-S , LGA1200, TDP 35W	
	BIOS	AMI UEFI BIOS			
PCH	PCH	H510	Q570	H510	Q570
	Chipset	Intel UHD Graphics			
Graphics	VRAM	64GB (Max)			
	Multi displays	Support Dual displays			
	Interface	1 x HDMI1.4, resolution 4096 x 2160 @ 30Hz 1 x 80pin JAE Con. (HDMI2.0), resolution 4096 x 2160 @ 60Hz 1 x DP1.2 (Integrated in Type C), resolution 4096 x 2160 @ 60Hz		1 x HDMI2.0, resolution 4096 x 2160 @ 60Hz	
Memory	Type	2 x SO-DIMM DDR4			
	Max	32GB			
Ethernet	Lan IC	1 x Intel I219LM			
	Interface	10/100/1000Mbps			
	Connector	1 x RJ45			
Wireless	Type	PCIe+USB Wi-Fi/BT module ,support Intel CNVi module			
	Interface	1 x M.2 2230 for Wifi+BT module			
Storage	Type	SSD			
	Interface	1 x M.2 2280 for NVMe PCIE 4x / SATA SSD			
IO Interface	Front panel	1 x USB3.0 Type-C , 3 x USB 2.0 , 1 x USB 3.0	1 x USB3.2 Type-C 4 x USB 3.2 Type -A	1 x USB3.0 Type-C , 3 x USB 2.0 , 1 x USB 3.0	1 x USB3.2 Type-C 4 x USB 3.2 Type -A
		1 x HDMI1.4 1 x DP1.2 1 x RS232, DB9 (Option) 1 x RJ45 1 x MIC IN, 1 x Line out 2 x Wi-Fi/BT ANT 1 x Power button, 1 x Reset button		1 x HDMI2.0 1 x DP1.2 1 x RS232, DB9 (Option) 1 x RJ45 1 x MIC IN, 1 x Line out 2 x Wi-Fi/BT ANT 1 x Power button, 1 x Reset button	
	Rear panel	1 x JAE 80pin : 1 HDMI 2.0, 2 USB2.0 ,1 USB3.0, TTL, Audio out, 1 x 2.5/5.5 DC IN JACK ; 1 x Micro SIM Card			
Software	OS Supports	WINDOWS 10/LINUX			
	Watchdog	Support			
	vPro/AMT	/	Support	/	Support
	TPM	Support , TPM2.0 (Option)			
Power	Power input	12V / 19V DC IN, 2.5/5.5 DC Jack & JAE 80pin DC IN			
Size	L x W x H	Comply with ops standard module , 119 x 180 x 30 mm			
Environment	Operating Temp.	-5~45°C			
	Operating Humidity	10%~90% non-condensing			
	Storage Temp.	-20~70°C			

View

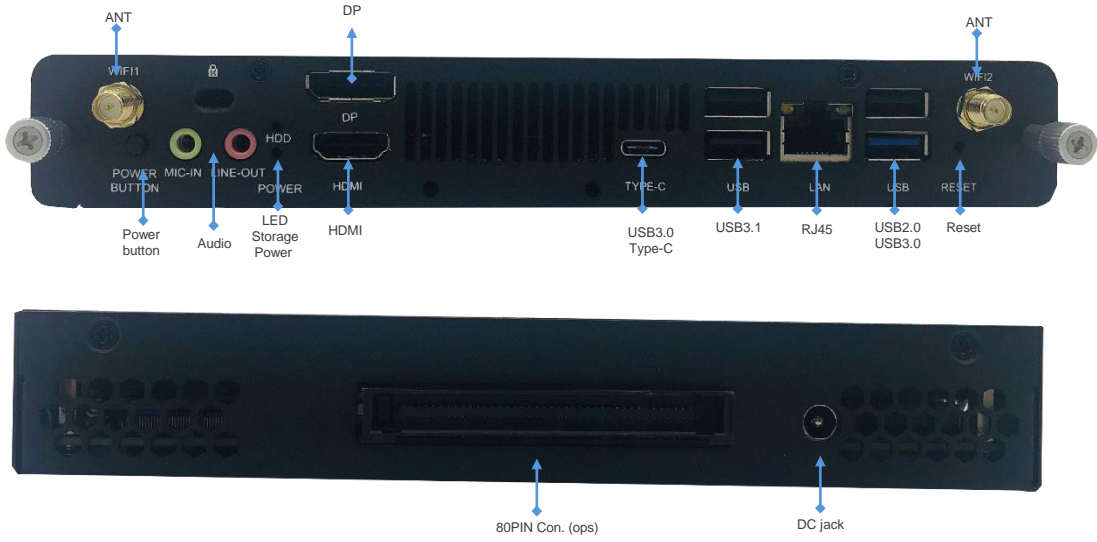

Size

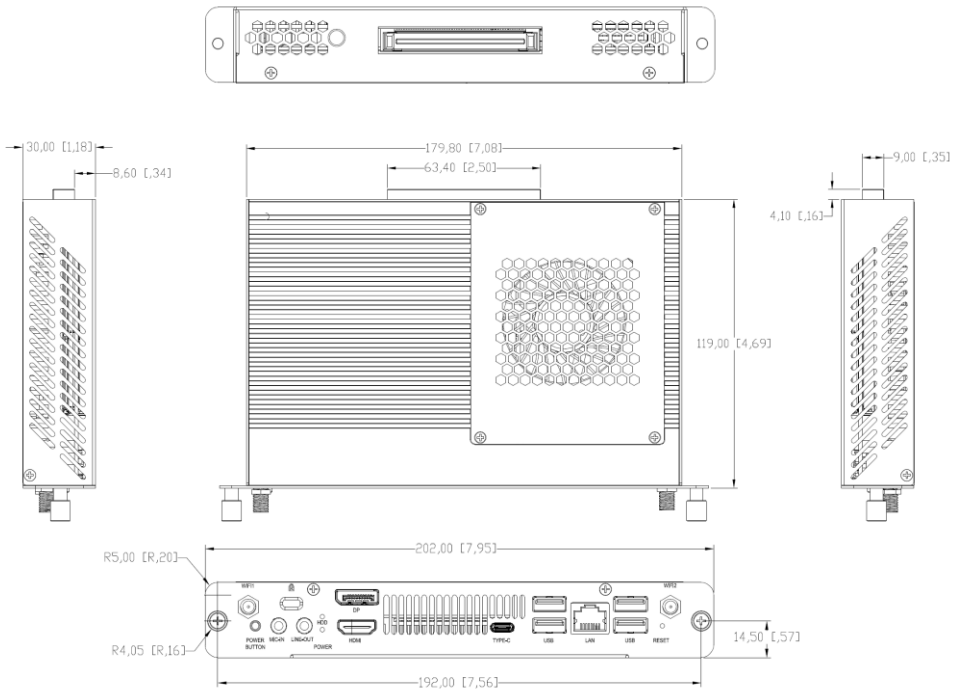

Information

Model	Description
S096-I3	I3-10100T/M.2 SSD/ SO-DIMM DDR4/ WIFI+BT module/ 2 HDMI2.0 /Type-C
S096-I5	I5-10500T/M.2 SSD/ SO-DIMM DDR4/ WIFI+BT module/ 2 HDMI2.0 /Type-C
S096-I5	I5-11400T/M.2 SSD/ SO-DIMM DDR4/ WIFI+BT module/ 2 HDMI2.0 /Type-C
S096-I5 vpro	I5-11500T/M.2 SSD/ SO-DIMM DDR4/ WIFI+BT module/ 2 HDMI2.0 /TPM2.0 /vPro /Type-C
S096-I7 vpro	I7-11700T/M.2 SSD/ SO-DIMM DDR4/ WIFI+BT module/ 2 HDMI2.0 /TPM2.0 /vPro /Type-C



Wechat



Website

Product descriptions are subject to change without notice.